


MEASURE YOUR VEHICLE

- A Measure the narrowest usable area across the floor of the cargo area where you would position the crate.** The narrowest usable area is often between the rear wheel-wells or at the bottom of the cargo door entrance.
- B Measure the top of the cargo area which is typically narrower than the usual floor space.** The left and right side of the crate are angled. Total crate width is approx. 10 cm narrower at the top.
- C Measure the usable length of the cargo floor from the back seat to the door sill.** The front and back of the crate are angled. Total crate width is approx. 30 cm narrower at the top.

- D Measure the height from the cargo floor to the lowest point at the top of the cargo door entrance.** Be sure to measure the shortest point which is often at the sides of the cargo entrance and not in the middle.

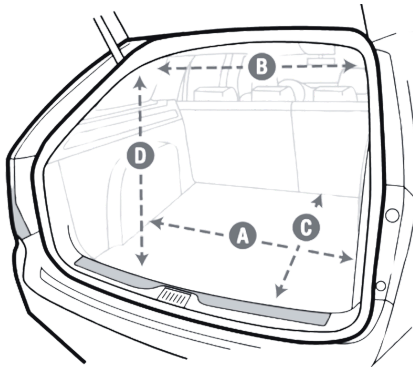

NOTE: If your vehicle has a raised sill at the rear cargo entrance, put something flat under the crate so its door opens correctly. We recommend rigid foam board insulation to minimise interference with your car's crumple zone. The floor of the cargo area should be flat.



The VarioCage is adjustable in length. The slope of the front, back and side are angled so it can easily fit in a typical cargo area. If you have a door with a steep angle, it may not close properly with the crate fully extended. Consider the final adjusted length of the crate to be sure it will offer enough space for your dog.

	Length (mm)	Width (mm)	Height (mm)	Weight* (kg)
VARIOCAGE MINIMAX				
390 - MiniMax (L)	570 - 770	450	455	9
366 - MiniMax (XL)	570 - 770	555	455	11
VARIOCAGE COMPACT**				
367 - Compact (L)	600-820	555	650	12
368 - Compact (XL)	600-820	700	650	14
VARIOCAGE SINGLE				
376 - Single (XS)	730-990	555	590	18
363 - Single (L)	760-1030	555	650	19
379 - Single (L+)	810-1030	700	690	23
380 - Single (XL)	810-1030	700	715	23
378 - Single (XXL+)	820-1060	700	780	26
381 - Single (MAX)	920-1160	700	845	31
VARIOCAGE DOUBLE				
377 - Double (S)	730-990	930	590	29
383 - Double (M)	760-1030	930	650	32
361 - Double (L)	760-1030	990	650	32
362 - Double (L+)	810-1030	990	690	34
364 - Double (XL)	810-1030	990	715	35
365 - Double (XXL)	810-1030	1060	715	37
382 - Double (XXL+)	820-1060	1060	780	44
369 - Double (MAX)	920-1160	1060	845	51
MULTICAGE SINGLE				
56154 - M	790	680	540	26
56160 - L	790	750	610	31
56175 - XL	940	880	750	41
MULTICAGE DOUBLE				
56254 - M	1200	680	540	38
56260 - L	1200	750	610	44
56175 - XL	1400	880	750	59
CARE2				
55131 - L - Yellow	480	440	400	6
55132 - L - Grey	480	440	400	6
55132 - L - Pink	480	440	400	6

*approx

**designed to work with a raised sill